


XPG SX8200 Pro PCIe Gen3x4  
M.2 2280 Solid State Drive

**LEVEL UP WITH  
INCREDIBLE  
PERFORMANCE**

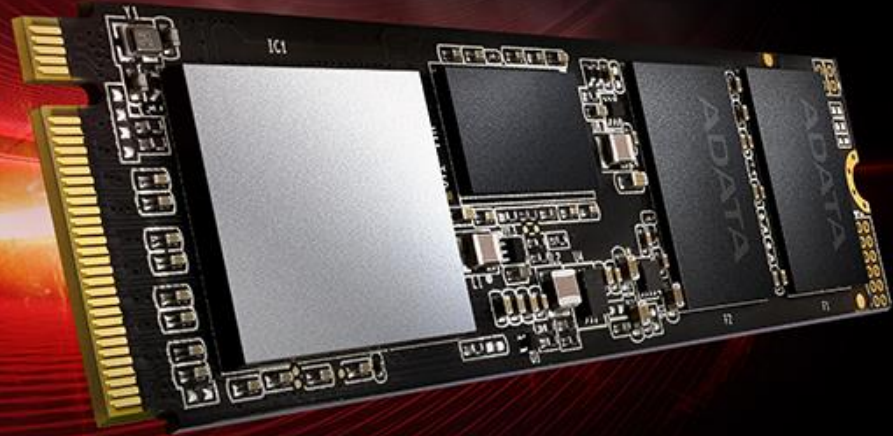

## **XPG SX8200 Pro PCIe Gen3x4 M.2 2280 Solid State Drive**

The SX8200 Pro M.2 2280 SSD is XPG's fastest SSD to date and is designed for avid PC enthusiasts, gamers, and overclockers. It features an ultra-fast PCIe Gen3x4 interface that offers peak read/write speeds of 3500/3000MB per second, outpacing SATA 6Gb/s by a wide margin. Supporting NVMe 1.3, the SX8200 Pro delivers excellent random read/write performance and multi-tasking capabilities. With SLC caching, a DRAM Cache buffer, E2E Data Protection, and LDPC ECC, it maintains high speeds and data integrity, even during highly intensive applications such as gaming rendering, and overclocking.

### **Features**

- Ultra-fast PCIe Gen3x4 interface:  
R/W speed up to 3500/3000MB/s
- NVMe 1.3 support
- 3D NAND Flash for higher capacity and durability
- Advanced LDPC ECC Technology
- SLC Caching and DRAM cache buffer
- E2E Data Protection and RAID Engine
- Compact M.2 2280 form factor – ideal for gaming and high-end desktops

### **Ordering Information**

Capacity	Model Number	EAN Code
<b>256GB</b>	ASX8200PNP-256GT-C	4713218469441
<b>512GB</b>	ASX8200PNP-512GT-C	4713218469458
<b>1TB</b>	ASX8200PNP-1TT-C	4713218469465

## Specifications

- Capacities: 256GB / 512GB / 1TB
- NAND Flash: 3D TLC
- Interface: PCIe Gen3x4
- Form Factor: M.2 2280
- MTBF: 2,000,000 hours
- Dimensions (L x W x T): 22 x 80 x 3.5mm
- Weight: 8g
- Power Consumption: 0.33W Active (Typical), 0.14W Slumber (Typical) (\*measured by power meter)
- Operating Temperature: 0°C~70°C
- Storage Temperature: -40°C~85°C
- Shock Resistance: 1500G/0.5ms
- Certifications: RoHS, CE, FCC, BSMI, VCCI, KC
- Warranty: 5 years

## Performance

Capacity	ATTO Seq. Read (MB/sec)	ATTO Seq. Write (MB/sec)	CDM (QD32) Seq. Read (MB/sec)	CDM (QD32) Seq. Write (MB/sec)	AS SSD Seq. Read (MB/sec)	AS SSD Seq. Write (MB/sec)	4K Random Read IOPS	4K Random Write IOPS	TBW
<b>256GB</b>	3350	1150	3500	1200	2950	1100	220K	290K	160TB
<b>512GB</b>	3350	2350	3500	2300	3000	2100	390K	380K	320TB
<b>1TB</b>	3350	2800	3500	3000	3000	2500	390K	380K	640TB

\*Performance may vary based on SSD capacity, hardware test platform, test software, operating system and other system variables

## Schematics

