





FlexScan EV2760 Swiss Edition

Your advantages

5

With an impressive 27-inch diagonal and a resolution of 2560 x 1440 pixels, the EV2760 offers all the space that's needed for efficient use in the office. No matter if it's text, graphics or videos, users enjoy crystal clear, incredibly detailed image reproduction on its large screen. Anti-reflection coating, flicker-free brightness control and a flexible stand facilitate ergonomic work. Its smart, three-sided, virtually frameless design means that you focus on what's most important while maintaining a clear overview of your work. Thanks to its EcoView functions, it boasts a low power consumption if, for example, you need a lower brightness level and a glare-free view. The EV2760 offers a wide range of connection possibilities with Display Port, HDMI and DVI-D signal inputs – not to mention four USB downstream ports.

- 27-inch IPS LCD monitor with a resolution of 2560 x 1440 pixels for excellent image quality
- Bezel only 1 mm for a compact and ultra-elegant design
- Flicker-free image reproduction thanks to hybrid brightness control
- Auto EcoView and EcoView Optimizer for maximum energy-efficiency and superb ergonomics
- Optimised anti-reflection properties and flexible positioning
- ✓ USB 3.1 hub with one upstream and four downstream ports
- 2 x DisplayPort, HDMI, DVI-D and D-Sub signal inputs
- Proven to be environmentally friendly and produced in a socially responsible way



Ultra-slim. Ultra-smooth!

Whether it's in sophisticated black or pristine, eye-grabbing white: The ultra-thin design with its bezel of only 1 mm is truly impressive. A thin black glass frame with a width of just 7.5 mm is all that separates the display and bezel from one another on both sides and the top. The side profile and the back of the monitor also have a slimline, delicate appearance. The monitor is really something to behold, giving you plenty of space for your imagination.




Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2760 instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.



Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 2560×1440 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd /m2. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

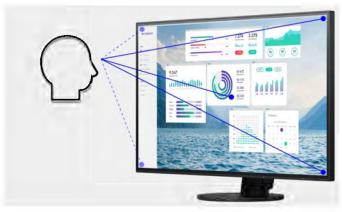

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay



Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.





Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values fully automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.






Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience. Flickering is reduced down to absolute freedom from flickering, without impairing image quality or colour stability. In addition, the brightness can be set to less than 1% of the

maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.


Anti-glare coating: more image, less reflection

The EV2760 offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2760 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.

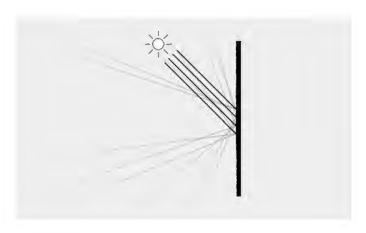

Flexible base

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.



Tilt down 5°, tilt up 35°






172° (right/left)

Rotation 90° (clockwise and anticlockwise)° clockwise and anticlockwise




One monitor, many ports

It doesn't get simpler than this: Most end devices, such as PCs, laptops and cameras, can be connected directly to the monitor, thanks to its wide range of signal interfaces. The screen also features four USB type A 3.1 ports. This allows different devices such as mice, keyboards and headsets to be connected. This makes your everyday work easier and guarantees a tidy desk.

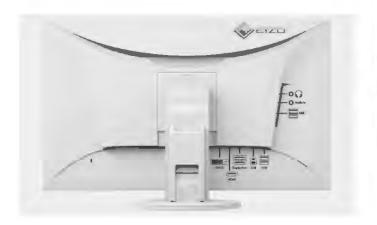

Preset colour modes: Optimised display at the press of a button

Preset colour modes make it easier for you to work and view images, texts and videos. Because when choosing colour settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button. For example, paper mode simulates the pleasant contrast of books by reducing the blue light portion and brightness. This reduces wear on your eyes when reading documents and prevents tiredness.

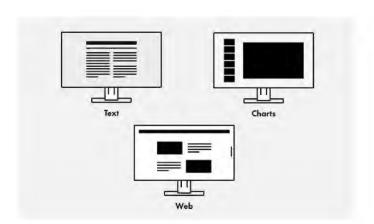

Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.



Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2760 by using the Screen InStyle software on a Windows PC. The configuration options include colour repro-duction, energysaving options, and ergonomic functions that, for example, allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

More about Screen InStyle


Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

More about Screen InStyle Server



Picture-by-Picture

The Picture-by-Picture mode allows you to display different signal sources on one screen. You can select which signal is to be displayed on the right or left half of the screen. Use the Picture-by-Picture mode, for example, if you want to connect two computers to one screen, or if you want to replace two individual screens connected to one computer.

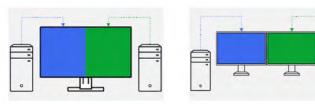


Monitor Configurator for cross-network settings

Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step – via a USB connection. This saves you time and ensures you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

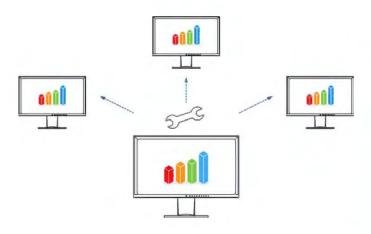



Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.

Environmentally and socially conscious production

EIZO uses the EV2760 to showcase how image and product quality go hand in hand with responsible planning, material procurement and production. This intrinsic value enables you to make a safe investment in a modern and reliable monitor.



Socially responsible production

The EV2760 is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Read the CSR report here



Environmentally and climate friendly

Each EV2760 is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR report.



Sustainable and durable

The EV2760 is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2760 we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2760 consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled plastic.



Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.





Compliance with standards and guidelines

The EV2760 is equipped with power management functions that further reduce the already quite low power consumption. Most FlexScan models meet the requirements of the TCO 8.0 display standard and correspond to strict international guidelines for ergonomics and energy conservation pursuant to EPA Energy Star, EPEAT and TÜV ergonomics.





Specification

\sim		
(76	ne	ra

22083 (white) | 22082 (black) White, black Case colors Office, Gaming Areas of application **Product line** FlexScan

Display

Screen size [in inches] 27 68.5 Screen size [in cm] 16:9 597 x 336 Viewable image size (width x height) 2560 x 1440 Ideal and recommended resolution Pixel pitch [mm] 0.233 x 0.233 109 Pixel density [ppi] Resolution supported $2560 \times 1440,\, 1920 \times 1200,\, 1920 \times 1080 \, \text{(Full HD)},\\ 1600 \times 1200,\, 1680 \times 1050,\, 1280 \times 1024,\, 1024 \times 768,\\$ 800 x 600, 720 x 400, 640 x 480

Panel technology IPS Max. viewing angle horizontal 178 Max. viewing angle vertical 178 °

Number of colours or greyscale 16.7 million colours (display port, 8 Bit), 16.7 million colours (HDMI, 8 Bit), 16.7 million colours (DVI, 8 Bit)

Colour palette/look-up table More than 1.06 billion hues/14-bit Max. colour space 350 Max. brightness (typical) [in cd/m²] 1000:1 Max. dark room contrast (typical) Typical response time [grey/grey 5 ms alternation Max. refresh rate [in hertz] 60 Backlight LED

Features & control

sRGB, Paper, DICOM, Movie, 2x free modes for user Preset colour/greyscale modes selection DICOM tone curve VIII RadiCS application classes Auto EcoView EcoView Index **EcoView Optimizer** Overdrive No flickering thanks to hybrid controls **HDCP** Decoder Input signal identification Built-in speakers OSD language

Brightness, Contrast, Gamma, All EcoView functions, Adjustment options

Colour saturation, Colour temperature, Colour Mode, Colour tone, Signal input, Overdrive, Resolution, Audio source, OSD language, Interpolation, Volume

Button Guide

Integrated power unit

Ports

Signal inputs 2x DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D USB 3.1 Gen **USB** specification **USB** upstream ports 1 x type B **USB** downstream ports 4 x type A DisplayPort, HDMI (YUV, RGB), DVI dual link (TMDS) Video sianal Audio input 3.5 mm stereo jack, DisplayPort, HDMI 3.5 mm stereo jack

Electric data

DisplayPort: 31-89 kHz / 59-61Hz (69-71Hz), HDMI: 31-89 kHz / 59-61Hz (29-31Hz, 49-51Hz, 69-71Hz), Frequency DVI: 31-89 kHz / 59-61Hz (29-31Hz, 69-71Hz) Power consumption (typical) [in watt] 16 Maximum Power Consumption [in 67 ((at maximum brightness with all signal inputs and USB ports in use)) watt1 0.5 Power Save Mode [in watt] Power consumption off [in watt] Ω Energy-efficiency class Α+ Annual energy consumption [in kWh] 25 AC 100-240V, 50/60Hz Power supply

Dimensions & weights

Dimensions [mm]	611,7 x 376,3-545,3 x 230
Weight [in kilograms]	8.5
Dimensions without stand [mm]	611,7 x 364,4 x 53,7
Weight without stand [in kilograms]	5.7
Swivel (right/left)	172 °
Incline forward/backward	5°/35°
Pivot	√ 90° (clockwise and anti-clockwise)
Height adjustment range [mm]	169
Hole spacing	VESA standard 100 x 100 mm

Certification & standards

Ce

ertification	CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS,
	TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue
	1 1. 1. C TÜN//Eb l E EDEAT 0010/UC\

Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, BSMI, BIS, CCC, RoHS, China RoHS, India RoHS, WEEE

Software & accessories

Accompanying software and other accessories are available for download	Screen InStyle	
Additional supply	Manual via download, Power cord, Signal cable Display- Port - DisplayPort, USB 3.0 cable, Quick guide	
Accessories	PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), ST-USBC-DP-CABLE (Startech signal cable for USB-CTM to DisplayPort connections), EIZO ScreenClear (for the best possible clean without scratching the monito	

Warranty

Warranty and service	5 years warranty*	

*) Maximum of 30,000 hours of operation from the date of purchase. **) Zero pixel error guarantee for completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.

EIZO AG

Audio output

Moosacherstrasse 6, Au 8820 Wädenswil ZH

Phone: +41 (0)44 782 24 40 www.eizo.ch

Data sheet created on 12.07.2020