


Bild / Picture

Anwendung / Application

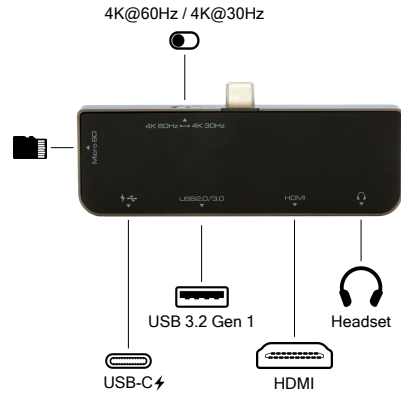

## 5-in-1 USB-C Mini Docking Station

## 5-in-1 USB-C Mini Docking Station

Beschreibung

Description

Die EX-1222HM ist eine kleine 5-in-1 USB-C Dockingstation, die direkt am Notebook oder Tablet angeschlossen wird und aufgrund der kompakten Masse dauerhaft im eingesteckt bleiben kann. Mit der EX-1222HM können an einem USB-C Port alle benötigten Peripheriegeräte angeschlossen werden. USB-C Power Delivery (PD) ermöglicht es, das Notebook oder Tablet direkt über die EX-1222HM mit dem vorhandenen USB-C Ladegerät aufzuladen.

The EX-1222HM is a small 5-in-1 USB-C docking station that connects directly to your notebook or tablet and can stay plugged in permanently due to its compact size. With the EX-1222HM, all the peripherals you need can be connected to one USB-C Port. USB-C Power Delivery (PD) allows the notebook or tablet to be charged directly via the EX-1222HM using the existing USB-C charger.

Merkmale

Features

<ul style="list-style-type: none"> <li>• 5 in 1 Mini-Dockingstation</li> </ul>	<ul style="list-style-type: none"> <li>• 5 in 1 mini docking station</li> </ul>
<ul style="list-style-type: none"> <li>• Langlebiges und elegantes Aluminiumdruckguss-Gehäuse</li> </ul>	<ul style="list-style-type: none"> <li>• Durable and elegant aluminum alloy case</li> </ul>
<ul style="list-style-type: none"> <li>• Unterstützt USB-C PD Ladefunktion bis 87W</li> </ul>	<ul style="list-style-type: none"> <li>• Supports USB-C PD charging up to 87W</li> </ul>
<ul style="list-style-type: none"> <li>• HDMI, USB 3.2 Gen 1, USB-C PD, 3.5 mm Audio in/out</li> </ul>	<ul style="list-style-type: none"> <li>• HDMI, USB 3.2 Gen 1, USB-C PD, 3.5 mm Audio in/out</li> </ul>
<ul style="list-style-type: none"> <li>• Umschalter: HDMI 4K@60Hz / USB 2.0 HDMI 4K@30Hz / USB 3.2 Gen 1</li> </ul>	<ul style="list-style-type: none"> <li>• Switcher: HDMI 4K@60Hz / USB 2.0 HDMI 4K@30Hz / USB 3.2 Gen 1</li> </ul>
<ul style="list-style-type: none"> <li>• Kartenleser für microSD/SDHC/SDXC</li> </ul>	<ul style="list-style-type: none"> <li>• Card reader for microSD/SDHC/SDXC</li> </ul>
<ul style="list-style-type: none"> <li>• Für Notebooks/MacBooks/Tablets mit USB-C Anschluss (DP Alt Mode)</li> </ul>	<ul style="list-style-type: none"> <li>• For Notebooks/MacBooks/Tablets with USB-C port (DP Alt Mode)</li> </ul>

System / OS

Geprüft / Approved

Verpackung / Packaging



### Spezifikation

### Specification

<b>Datentransfer-Rate:</b>	120Mbps bis 5Gbps	<b>Data transfer rate:</b>	120Mbps up to 5Gbps
<b>Anschlüsse:</b>	1x C-Stecker Upstream 1x C-Buchse Power (PD) 1x USB 3.2 Gen 1 A-Buchse 1x HDMI 4K@60Hz / 4K@30Hz 1x 3.5 mm Klinke Audio-Ausgang 1x micro SD-Slot	<b>Connectors:</b>	1x C-Male Upstream 1x C-Female Power (PD) 1x USB 3.2 Gen 1 A socket 1x HDMI 4K@60Hz / 4K@30Hz 1x 3.5 mm jack audio output 1x micro SD slot
<b>Hardwaresysteme:</b>	USB 3.2 Gen 1 / USB 2.0	<b>Hardware system:</b>	USB 3.2 Gen 1 / USB 2.0
<b>Treiber:</b>	Benötigt keine Treiber (Standard HUB)	<b>Driver:</b>	No driver necessary (Standard HUB)
<b>Betriebssysteme:</b>	Win98SE/2000/XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x	<b>Operating systems:</b>	Win98SE/2000/XP/Vista/7/8.x/10/11 (32&64-Bit) /CE/ Server (200x & 2012 R2), Linux, Mac OS 10.x
<b>Betriebstemperatur :</b>	0°C bis +55°C Celsius	<b>Operating temperature :</b>	32°F up to 131°F Fahrenheit
<b>Lagertemperatur:</b>	-20°C bis +85°C Celsius	<b>Storage temperature:</b>	-20°F up to 167°F Fahrenheit
<b>Rel. Luftfeuchtigkeit:</b>	5% bis 95%	<b>Rel. Humidity:</b>	5% to 95%
<b>Stromversorgung:</b>	+5V	<b>Current Supply:</b>	+5V
<b>Abmessung:</b>	90.00 x 37.00 x 10.00 mm	<b>Size:</b>	90.00 x 37.00 x 10.00 mm
<b>Gewicht:</b>	33 g	<b>Weight:</b>	33 g
<b>EAN:</b>	4718359012228	<b>EAN:</b>	4718359012228
<b>Ursprungsland:</b>	China	<b>Country of origin:</b>	China
<b>Lieferumfang:</b>	EX-1222HM, Handbuch	<b>Packaging contents:</b>	EX-1222HM, Manual

### Bilder / Picture

