



Philips Evnia Gaming
Monitor
QD OLED gaming monitor

Evnia 8000

49 (48.9" / 124.3 cm diag.)
5120 x 1440 (Dual QHD)



49M2C8900

Gaming beyond innovation

Elevate your gaming experience with this monitor's incredible contrast-producing QD OLED display, 32:9 Curved SuperWide screen and exclusive Ambiglow feature so you can set the mood of the room for each game.

Built for fast action

- Ultra-fast 240 Hz refresh rate for virtually lag-free gaming
- VESA Certified ClearMR: for accurate blur testing
- SmartImage game mode optimised for gamers
- Low input lag reduces time delay between devices to monitor

Immersive visuals

- QD OLED for superior colours and vibrant visuals
- True 10-bit display reproduces smoother gradients on visuals
- DisplayHDR™ True Black 400 delivers incredible shadow details
- Curved display design for a more immersive experience

Features designed for gamers' needs

- Ambiglow intensifies entertainment with a halo of light
- Connect your notebook with one USB-C cable
- Access and display multiple sources on two devices
- DTS Sound™ with 30 W output: for enhanced audio



reddot winner 2023

EVNIA

PHILIPS

QD OLED gaming monitor
Evnia 8000 49 (48.9" / 124.3 cm diag.), 5120 x 1440 (Dual QHD)


Highlights

QD OLED technology




QD-OLED represents a hybrid approach that marries OLED panels and quantum dot technology. By combining what's best of both, QD-OLED guarantees high contrast, deep blacks and unlimited viewing angles, with a higher peak brightness and more vibrant colours.

Curved display design

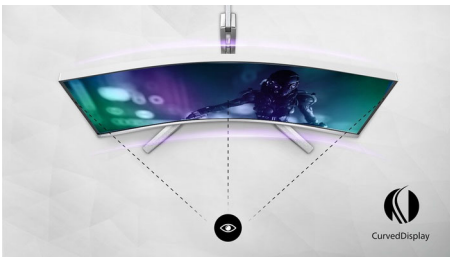

Desktop monitors offer a personal user experience, which suits a curved design very well. The curved screen provides a pleasant yet subtle immersion effect, which focuses on you at the centre of your desk.

True 10-bit colour depth

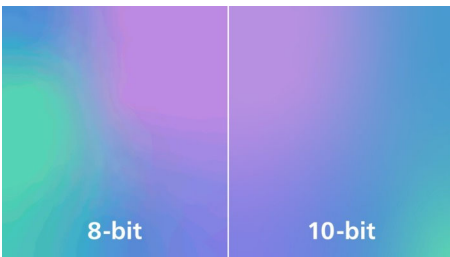

With this Philips true 10-bit colour display, you can see colour-critical professional work of exceptional colour accuracy that meets professional standards. Compared with conventional 8-bit colour displays, this Philips monitor produces a more natural transition between hues for smoother gradients.

DisplayHDR™ True Black 400



This Philips monitor is certified with VESA DisplayHDR™ True Black 400, delivering stunningly accurate shadow details with deeper blacks for a remarkable visual experience compared with conventional monitors of the same peak luminance. This Philips monitor comes with several HDR modes, each optimised for your usage scenarios: HDR Game, HDR Movie, HDR Photo and VESA DisplayHDR-certified level.

VESA ClearMR 13000

Previously, methods to test blur on screen were measured through MRPT. VESA Certified ClearMR acts as an alternative to MRPT and is designed to reflect the true nature of blur through digital high-speed camera testing. For monitors that are sent in and certified through VESA Certified ClearMR, you can rest assured that you will have an accurate assessment of the monitor's blur quality. Each certification is defined through a CMR range; with this monitor being ClearMR 13000 classified, it has one of the highest classifications of image quality, meaning less overall blur.

DTS Sound™ with 30 W output




Your elevated sound experience has arrived. This monitor is equipped with four 7.5 watt speakers, ultimately adding up to a 30 W output sound system. In addition to the extra wattage, the DTS Sound speakers provide a

49M2C8900/00


warm, detailed and enhanced audio experience that will ultimately make your gaming experience more immersive.

Ambiglow technology

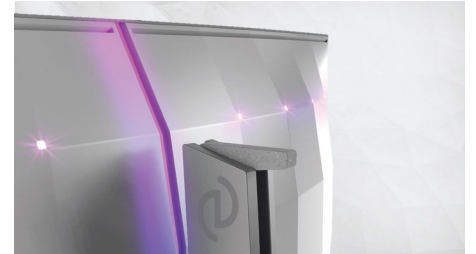

Ambiglow adds a new dimension to your viewing experience. The innovative Ambiglow technology enhances the content on the screen by creating a halo of light from the monitor. Its fast processor analyses the incoming image content and continuously adapts the colour and brightness of the emitted light to match the image. Especially suited for watching movies, sports or playing games, Philips Ambiglow offers you a unique and immersive viewing experience.

MultiView and built-in KVM

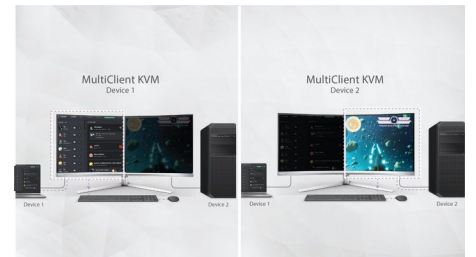

Control and switch between two devices through a single keyboard and mouse with the built-in KVM. MultiView lets you survey both sources simultaneously on one screen. With these features, you can reduce cable clutter and save valuable time. Perfect for streamers with two PCs, content creators or when prepping devices for a LAN event.



Specifications

Picture/Display

- Monitor Panel Type: QD OLED
- Panel Size: 48.9 inch / 124.3 cm
- Display Screen Coating: Anti-Glare, Low-reflection 2%, Haze 25%
- Effective viewing area: 1196.7 (H) x 339.2 (V) - at a 1800R curvature*
- Pixel format: RGB Q-Stripe*
- Aspect ratio: 32:9
- Maximum resolution: 5120 x 1440 @ 240 Hz
- Pixel Density: 108.77 PPI
- Response time (typical): 0.03 ms (Grey to Grey)*
- Low Input Lag
- Brightness: SDR: 250 (APL 100%) nit, HDR: 450 (APL 10%) nit, HDR E/P: 1000 (APL 3%) nit
- SmartContrast: Mega Infinity DCR
- Contrast ratio (typical): 15,000,000:1
- Pixel pitch: 0.233 x 0.233 mm
- Viewing angle: @ C/R > 10000, 178° (H) / 178° (V)
- Flicker-free
- HDR: DisplayHDR True Black 400 certified
- Colour gamut (min.): DCI-P3: 99%*
- Colour gamut (typical): NTSC 127.4%*, sRGB 153.1%*, Adobe RGB 125.2%*
- Picture enhancement: SmartImage game
- Display colours: Colour support 1.07 billion colours (10-bit)
- Scanning Frequency: 30 - 388 kHz (H) / 48 - 240 Hz (V)
- LowBlue Mode
- EasyRead
- Delta E: < 2 (sRGB)
- sRGB
- Adaptive sync
- Ambiglow: 3 sided

Connectivity

- Signal Input: HDMI 2.1 x 2, DisplayPort 1.4 x 1, USB-C x 1 (DP Alt mode, Power Delivery)
- HDCP: HDCP 1.4 (HDMI/DisplayPort/USB-C), HDCP 2.2 (HDMI/DisplayPort/USB-C), HDCP 2.3

(HDMI/DisplayPort/USB-C)

- USB Hub: USB version 3.2 Gen1 / 5 Gbps, USB-B upstream x 1, USB-A downstream x 4 (with 2 for fast charge B.C 1.2) - TBC
- Audio (In/Out): Audio out
- Sync Input: Separate Sync

Power Delivery

- Version: USB PD version 3.0
- Max power delivery: Up to 90 W (5 V/3 A, 7 V/3 A, 9 V/3 A, 10 V/3 A, 12 V/3 A, 15 V/3 A, 20 V/4.5 A)

Convenience

- Built-in Speakers: 7.5 W x 4, DTS
- MultiView: PIP/PBP mode, 2 x devices
- KVM
- User convenience: Power On/Off, Menu/OK, Input/Up, Game Settings/Down, SmartImage game/Back
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Simplified Chinese, Swedish, Turkish, Traditional Chinese, Ukrainian
- Other convenience: Kensington lock, VESA mount (100 x 100 mm)
- Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11/10/8.1/8
- Low blue light: Low blue light compliance*

Sound

- Output Power: 30 W, 2.2 Channel
- Sound Enhancement: DTS Sound
- Speaker Configuration: 7.5 W x 2 tweeters, 7.5 W x 2 woofers with flow port

Stand

- Height adjustment: 120 mm
- Swivel: +/- 20 degree
- Tilt: -5/15 degree

Power

- On mode: 163.35 W (typ.)
- Standby mode: 0.5 W (typ.)
- Off mode: 0.3 W (typ.)
- Energy Label Class: G
- Power LED indicator: Operation - White, Standby mode - White (flashing)
- Power supply: Internal, 100–240 VAC, 50–60 Hz

Dimensions

- Product with stand (max height): 1195 x 544 x 359 mm
- Product without stand (mm): 1195 x 369 x 181 mm
- Packaging in mm (W x H x D): 1290 x 300 x 475 mm

Weight

- Product with stand (kg): 13.96 kg
- Product without stand (kg): 10.82 kg
- Product with packaging (kg): 19.41 kg

Operating conditions

- Temperature range (operation): 0°C to 40 °C
- Temperature range (storage): -20°C to 60 °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
- MTBF: 30,000 hour(s)

Sustainability

- Environmental and energy: RoHS
- Recyclable packaging material: 100 %
- Specific Substances: Mercury free, PVC/BFR free housing

Compliance and standards

- Regulatory Approvals: CB, CE Mark, FCC Class B, ICES-003, CU-EAC, EAEU RoHS, TUV/ISO9241-307, TUV-BAUART, cETLus

Specifications

Cabinet

- Colour: White
- Finish: Textured

What's in the box?

- Monitor with stand

- Cables: HDMI cable, DisplayPort cable, USB upstream cable, USB-C to USB-C cable, Power cable
- User Documentation
- Accessory: Remote control, VESA bracket

Issue date 2023-08-09

Version: 2.3.2

12 NC: 8670 001 89185
EAN: 87 12581 80166 3

© 2023 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com

* For best output performance, please always ensure that your graphic card is capable of achieving the maximum resolution and refresh rate of this Philips display.

* DCI-P3 Coverage based on CIE1976

* NTSC Area based on CIE 1976

* sRGB Area based on CIE1931

* Adobe RGB Area based on CIE1976

* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.

* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode

* Radius of the arc of the display curvature in mm

* The ratio of display emission light in the range from 415 - 455 nm to the display emission of 400 - 500 nm shall be less than 50%.

* Active pixels: 3440 (H) x 1440 (V). Number of total pixels: 3456 (H) x 1456 (V); extra 8 pixels on each side, space reserved for pixel orbiting.

* Response time value equal to SmartResponse. The measurement pattern is 1 horizontal line.

* The monitor may look different from feature images.