

## Features

- ▶ HDMI 2.0 via USB Alt-Mode for resolutions up to 4K UltraHD 60Hz
- ▶ Gold plated precision contacts, unidirectional
- ▶ USB-C male to HDMI-A male
- ▶ High purity copper conductors and triple shielding
- ▶ 100% tested for professional AV applications

### Connections

Connector Material	ABS Plastic
Contact Material	Gold-plated
Directionality	Unidirectional from USB-C Source to HDMI Display, Active Signal Conversion
Connector 1	USB-C Male
Dimensions Connector 1	ca. 30 x 12.5 x 6.65 mm
Connector 2	HDMI-A Male
Dimensions Connector 2	ca. 55 x 21 x 11 mm

### Cable



Type	Round Cable
Construction	4x Twisted Pairs 34AWG + 6x Single Conductor 34AWG + 2x Single Conductor 28AWG
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Outer Diameter	3.9mm
Minimum Bend Radius	27.3mm
Dielectric Strength	AC 500V / 1 Minute
Sheath Printing	/

### Signal Transmission

Standard	USB-C DP Alt-Mode   HDMI v2.0, Premium High Speed HDMI
Bandwidth	18 Gbps
Max. Resolution	4K UltraHD 60Hz (4:4:4)

### General

Transmission Distance	Up to 3.00m
Operation Temperature	0°C - 45°C
Colour	White / Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, FCC, ROHS, REACH, WEEE

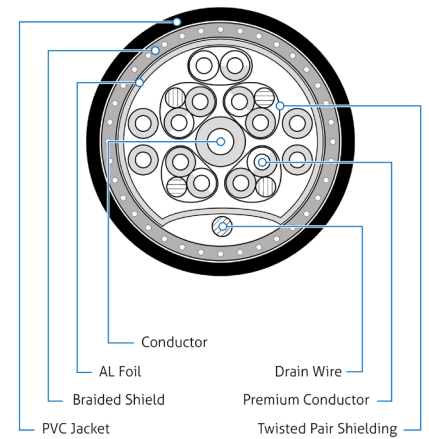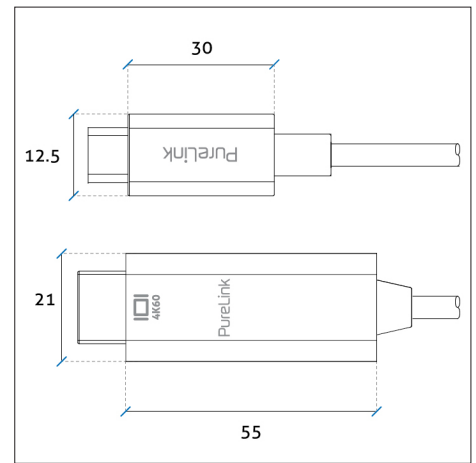

## IS2200 / IS2201 Overview

Parent	Art. No.	Length	Colour	EAN
IS2200	IS2200-010	1.00m	white	4251364709566
	IS2200-015	1.50m	white	4251364709573
	IS2200-020	2.00m	white	4251364709580
	IS2200-030	3.00m	white	4251364709597
IS2201	IS2201-010	1.00m	black	4251364728659
	IS2201-015	1.50m	black	4251364728666
	IS2201-020	2.00m	black	4251364728673
	IS2201-030	3.00m	black	4251364728680

