

Features

- ▶ DisplayPort 1.2 via USB Alt-Mode for resolutions up to 4K UltraHD 60Hz
- ▶ Gold plated precision contacts, unidirectional
- ▶ USB-C male to DisplayPort male
- ▶ High purity copper conductors and triple shielding
- ▶ 100% tested for professional AV applications

Connections

Connector Material	ABS Plastic
Contact Material	Gold-plated
Directionality	Unidirectional from USB-C Source to DisplayPort Display, Active Signal Conversion
Connector 1	USB-C Male
Dimensions Connector 1	ca. 30 x 12.5 x 6.65 mm
Connector 2	DisplayPort Male
Dimensions Connector 2	ca. 55 x 21.5 x 10 mm

Cable



Type	Round Cable
Construction	4x Twisted Pairs 34AWG + 6x Single Conductor 34AWG + 2x Single Conductor 28AWG
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Outer Diameter	3.9mm
Minimum Bend Radius	27.3mm
Dielectric Strength	AC 500V / 1 Minute
Sheath Printing	/

Signal Transmission

Standard	USB-C DP Alt-Mode DisplayPort 1.2, HBR2
Bandwidth	21.6 Gbps
Max. Resolution	4K UltraHD 60Hz (4:4:4)

General

Transmission Distance	Up to 3.00m
Operation Temperature	0°C - 45°C
Colour	White / Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, FCC, ROHS, REACH, WEEE

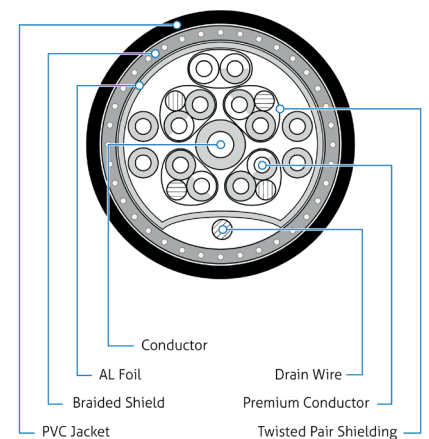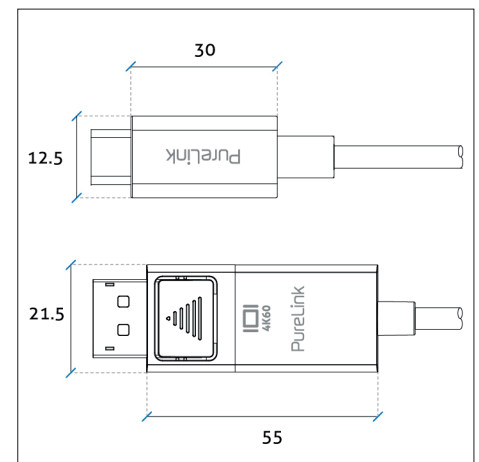

IS2220 / IS2221 Overview

Parent	Art. No.	Length	Colour	EAN
IS2220	IS2220-010	1.00m	white	4251364709603
	IS2220-015	1.50m	white	4251364709610
	IS2220-020	2.00m	white	4251364709627
	IS2220-030	3.00m	white	4251364709634
IS2221	IS2221-010	1.00m	black	4251364728697
	IS2221-015	1.50m	black	4251364728703
	IS2221-020	2.00m	black	4251364728710
	IS2221-030	3.00m	black	4251364728727

