

**PI3000**

## High Speed HDMI DVI Cable




Due to its high reliability, the PureInstall Series High Speed HDMI to DVI connection cable PI3000 is particularly suited for professional applications and installations. This series offers excellent value for money, without compromising the quality. Optimal for the transmission of video signals, e.g. connecting a graphics card to an HDMI-enabled display.

- ➔ High Speed connection for video resolution to WUXGA (1920x1200) and FullHD (1920x1080)
- ➔ High purity tinned plated OFC copper conductor and 3-layer shielding for optimized transmission quality
- ➔ Particularly qualified for professional applications and installations


### Connections

Plug material:	PVC
Contact material:	24-Carat gold plated
Shielding:	Yes
Connector 1:	HDMI Type A Male (19pin)
Dimension connector 1:	43,5 x 19,5 x 10,5 (mm)
Connector 2:	DVI-D Male (18+1pin)
Dimension connector 2:	47,7 x 37,7 x 15,8 (mm)

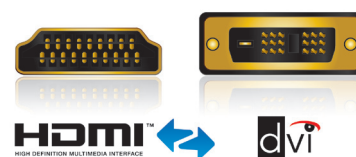

### Cable

Type:	Round cable
Length:	1,00m   2,00m   3,00m   5,00m   7,50m   10,0m   15,0m
Inner conductor material:	High purity tinned plated OFC Copper <b>A</b>
AWG:	AWG28 to 5m   AWG24 from 7,50m
Number of shieldings:	3-layer <b>B</b>
Shielding 1:	Aluminum foil (100% sealed)
Shielding 2:	Aluminum foil (100% sealed)
Shielding 3:	Braid (100% sealed)
Outer sheath material:	High flexible PVC <b>C</b>
Outer sheath diameter:	7,3mm to 5m   10,5mm from 7,50m

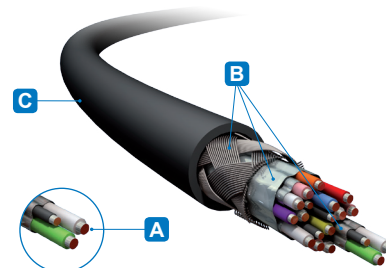

### Signal transmission

Transmission modes:	Digital video signals
Max. bandwidth:	165 MHz
Max. Transfer rate:	3,72 Gbit/s
Max. resolution:	1920x1200 WUXGA
Supported color spaces :	8 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards:	-
Other supported standards:	HDCP, CEC, FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)



Model No.	Color	Length
PI3000-01	black	1,00 m
PI3000-02	black	2,00 m
PI3000-03	black	3,00 m
PI3000-05	black	5,00 m
PI3000-075	black	7,50 m

Model No.	Color	Length
PI3000-10	black	10,00 m
PI3000-15	black	15,00 m

