



PI1300

## High Speed Micro HDMI Cable with Ethernet Channel




Due to its high reliability, the PureInstall Series Micro High Speed HDMI cable PI1300 is particularly suited for professional applications and installations. This series offers excellent value for money, without compromising the quality. Ideal for the connection of the latest generation of portable multimedia devices.

- ➔ High Speed HDMI für 3D und HDTV Auflösungen bis 4k (2160p)
- ➔ Integrierter Ethernet Kanal für 100 MBit Netzwerk Übertragung via HDMI
- ➔ Hochreine verzinnte OFC Kupferleiter und 3-layer Schirmung für optimale Übertragungsqualität
- ➔ Insbesondere geeignet für professionelle Anwendungen und Installationen


### Connections

Plug material:	PVC
Contact material:	24-Carat gold plated
Shielding:	Yes
Connector 1:	HDMI Type A Male (19pin)
Dimension connector 1:	43,5 x 19,5 x 10,5 (mm)
Connector 2:	HDMI TypeD Male (19pin)
Dimension connector 2:	30,0 x 10,8 x 7,8 (mm)

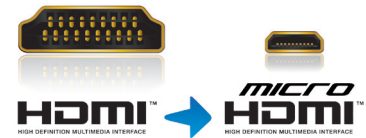

### Cable

Type:	Round cable
Length:	1,00m   1,50m
Inner conductor material:	High purity tinned plated OFC Copper <b>A</b>
AWG:	AWG32
Number of shieldings:	3-layer <b>B</b>
Shielding 1:	Aluminum foil (100% sealed)
Shielding 2:	Aluminum foil (100% sealed)
Shielding 3:	Braid (100% sealed)
Outer sheath material:	High flexible PVC <b>C</b>
Outer sheath diameter:	6,0mm

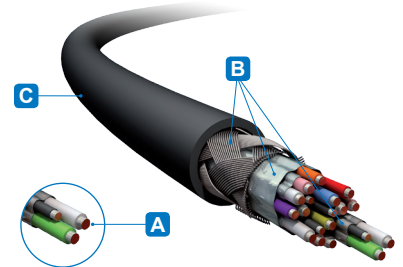

### Signal transmission

Transmission modes:	Digital audio and video signals
Max. bandwidth:	340 MHz
Max. Transfer rate:	10,2 Gbit/s
Max. resolution:	4K (4096x2160)
Supported color spaces :	16/24 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards:	Audio-Return-Channel (ARC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD Audio, SA-CD
Other supported standards:	HDMI Ethernet Channel (HEC), 3D, HDCP, CEC, 4K2K (2160i/p), FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)



Model No.	Color	Length
PI1300-01	black	1,00 m
PI1300-015	black	1,50 m

