



PI1000

from 7,50m Length

Standard Speed HDMI Cable with Ethernet Channel




Due to its high reliability, the PureInstall Series Standard Speed HDMI connection cable PI1000 is particularly suited for professional applications and installations. This series offers excellent value for money, without compromising the quality.

- ➔ Standard Speed HDMI for 3D and HDTV resolutions up to 1080p
- ➔ Integrated Ethernet channel for 100 MBit network transfer via HDMI
- ➔ High purity tinned plated OFC copper conductor and 3-layer shielding for optimized transmission quality
- ➔ Particularly qualified for professional applications and installations


Connections

Plug material:	PVC
Contact material:	24-Carat gold plated
Shielding:	Yes
Connector 1:	HDMI Type A Male (19pin)
Dimension connector 1:	53,5 x 19,5 x 10,5 (mm)
Connector 2:	HDMI Type A Male (19pin)
Dimension connector 2:	53,5 x 19,5 x 10,5 (mm)

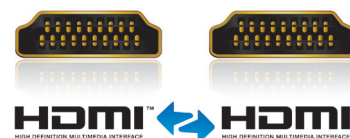

Cable

Type:	Round cable
Length:	7,50m 10,0m 15,0m 20,0m
Inner conductor material:	High purity tinned plated OFC Copper A
AWG:	AWG24
Number of shieldings:	3-layer B
Shielding 1:	Aluminum foil (100% sealed)
Shielding 2:	Aluminum foil (100% sealed)
Shielding 3:	Braid (100% sealed)
Outer sheath material:	High flexible PVC C
Outer sheath diameter:	10,5mm

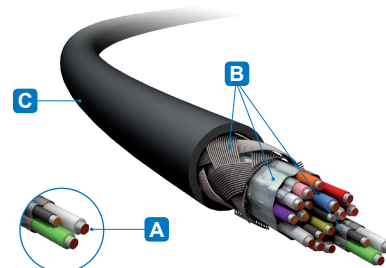

Signal transmission

Transmission modes:	Digital audio and video signals
Max. bandwidth:	165 MHz
Max. Transfer rate:	6,75 Gbit/s
Max. resolution:	FullHD (1080p)
Supported color spaces :	16/24 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards:	Audio-Return-Channel (ARC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD Audio, SA-CD
Other supported standards:	HDMI Ethernet Channel (HEC), 3D, HDCP, CEC, FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)



Model No.	Color	Length
PI1000-075	black	7,50 m
PI1000-10	black	10,00 m
PI1000-15	black	15,00 m
PI1000-20	black	20,00 m

