


PCI Express x4 Card to 4 x USB Type-C™ + 1 x USB Type-A - SuperSpeed USB 10 Gbps - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **five USB 3.2 ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

Sufficient ports - 4 x USB Type-C™ and 1 x USB Type-A

The PCIe card offers four external USB-C™ ports as well as one internal USB Type-A port. Thus devices can be connected with **10 Gbps** at each port.

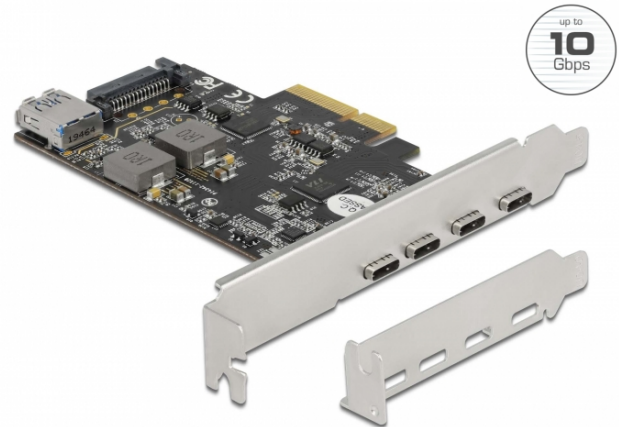

Specification

- Connectors:
 - external: 4 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
 - internal:
 - 1 x PCI Express x4 (2-Lane), V3.0
 - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
 - 1 x SATA 15 pin power connector
- Chipset: Asmedia ASM3142, VIA VL822
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via SATA power connector
- Electrical power:
 - USB Type-C™: max. 15 watt (5 V / 3 A)
 - USB Type-A: max. 4.5 watt (5 V / 0.9 A)
- Bootable
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -20 °C ~ 60 °C
- Humidity: 20 ~ 80 %

System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2016
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- User manual

Item no. 90059

EAN: 4043619900596

Country of origin: China

Package: Box

Images



General	
Function:	bootable
Supported operating system:	Linux Kernel 5.4 or above Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2016
Interface	
External:	4 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power connector 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
Technical characteristics	
Chipset:	Asmedia ASM3142 VIA VL822
Data transfer rate:	10 Gbps